


Developers and Manufacturers of
Hydraulic Flanges & Components

FLANGED RUN TEE FLANGES

SAE BOLT PATTERN			61 SERIES								
FLANGE SIZE	FLANGE SIZE	PART NUMBER	A	B	C	D	E	F	L	O-RING [®]	WT
1/2	1/2	1205-08-08	2.00	2.12	2.00	1.500	.688	.50	1.000	210	2.0
		1206-08-08	RECOMMENDED ALT PART #1186-08-08								
3/4	3/4	1205-12-12	2.50	2.62	2.25	1.875	.875	.75	1.250	214	3.5
		1206-12-12	RECOMMENDED ALT PART #1186-12-12								
1	1	1205-16-16	2.50	2.82	2.50	2.062	1.031	1.00	1.562	219	4.0
		1206-16-16	RECOMMENDED ALT PART #1186-16-16								
1 1/4	1 1/4	1205-20-20	3.00	3.19	3.00	2.312	1.188	1.25	1.750	222	6.4
		1206-20-20	RECOMMENDED ALT PART #1186-20-20								
1 1/2	1 1/2	1205-24-24	3.50	3.75	3.50	2.750	1.406	1.50	2.125	225	10.7
		1206-24-24	RECOMMENDED ALT PART #1186-24-24								
2	2	1205-32-32	4.00	4.00	4.00	3.062	1.688	1.94	2.500	228	13.6
		1206-32-32	RECOMMENDED ALT PART #1186-32-32								
2 1/2 ^②	2 1/2	1205-40-40	4.50	4.50	4.50	3.500	2.000	2.44	3.000	232	18.3
		1206-40-40	RECOMMENDED ALT PART #1186-40-40								
3 ^③	3	1205-48-48	5.50	5.31	5.50	4.188	2.438	2.94	3.625	237	31.7
		1206-48-48	RECOMMENDED ALT PART #1186-48-48								
3 1/2 ^④	3 1/2	1205-56-56	6.00	6.00	6.00	4.750	2.750	3.44	4.109	241	45.0
		1206-56-56	RECOMMENDED ALT PART #1186-56-56								
4 ^④	4	1205-64-64	7.00	6.38	7.00	5.125	3.062	3.94	4.609	245	58.2
		1206-64-64	RECOMMENDED ALT PART #1186-64-64								
5 ^④	5	1205-80-80	8.00	7.25	8.00	6.000	3.625	4.94	5.609	253	89.0
		1206-80-80	RECOMMENDED ALT PART #1186-80-80								

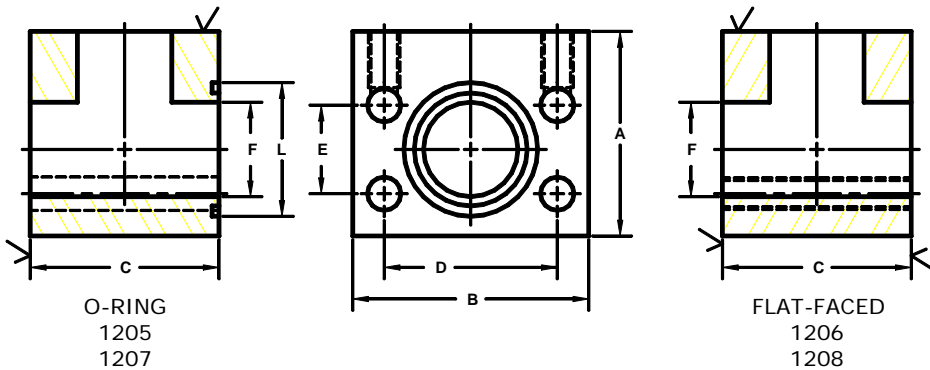

SAE BOLT PATTERN			62 SERIES								
FLANGE SIZE	FLANGE SIZE	PART NUMBER	A	B	C	D	E	F	L	O-RING [®]	WT
1/2	1/2	1207-08-08	2.00	2.22	2.00	1.594	.718	.50	1.000	210	2.0
		1208-08-08	RECOMMENDED ALT PART #1188-08-08								
3/4	3/4	1207-12-12	2.50	2.81	2.50	2.000	.937	.75	1.250	214	4.3
		1208-12-12	RECOMMENDED ALT PART #1188-12-12								
1	1	1207-16-16	3.00	3.19	3.00	2.250	1.093	1.00	1.562	219	7.0
		1208-16-16	RECOMMENDED ALT PART #1188-16-16								
1 1/4	1 1/4	1207-20-20	3.50	3.75	3.50	2.625	1.250	1.25	1.750	222	10.8
		1208-20-20	RECOMMENDED ALT PART #1188-20-20								
1 1/2	1 1/2	1207-24-24	4.00	4.50	4.00	3.125	1.437	1.50	2.125	225	16.6
		1208-24-24	RECOMMENDED ALT PART #1188-24-24								
2	2	1207-32-32	5.00	5.25	5.00	3.812	1.750	1.94	2.500	228	29.7
		1208-32-32	RECOMMENDED ALT PART #1188-32-32								
2 1/2 ^⑤	2 1/2	1207-40-40	6.00	7.00	5.00	4.875	2.312	2.44	3.000	232	47.9
		1208-40-40	RECOMMENDED ALT PART #1188-40-40								
3 ^⑤	3	1207-48-48	7.00	8.50	6.00	6.000	2.812	2.94	3.625	237	85.0
		1208-48-48	RECOMMENDED ALT PART #1188-48-48								

1. Included. 2. 2500 PSI Max. 3. 2000 PSI Max. 4. 500 PSI Max. 5. Not included in SAE J518